

Just Add
Power

515PoE
2GΩ/3G+ 1080p Receiver

ULTRA^{HD} IP

Evolution Not Revolution

The Just Add Power 2GΩ/3G+ Receiver combines the enhanced audio and feature-set of the 3G system with the **maximum 1080p resolution** of 2G devices.

2GΩ/3G+ devices can be installed in 2G and 3G systems.

In 2G systems, a 2GΩ/3G+ Receiver is a direct replacement to a 2G+ Receiver and functions just like a 2G+ device.

In 3G systems, 2GΩ/3G+ Receivers provide a lower-cost solution for displays that will only show sources at **1080p resolution or lower**.



Build a future-proof infrastructure. Just Add Power 2GΩ/3G+ integrates seamlessly with both 2G and 3G. Build a 2GΩ system with 4K expansion plans or mix-and-match with 2GΩ on 1080p sources and 3G on 4K sources!



USB 2.0

Features	
Maximum 1080p video with HDCP 1.4	
Built-in Scaler - watch compatible sources at 1080p	
All lossless audio supported – including Dolby Atmos®	
Control endpoints with RS232 & IR*	
Enhanced Video Wall with rotation	
Image Play – Push, Pull & Pop	
CEC Control	
USB 2.0 over IP	
Stereo audio output with 170ms audio delay	

Compliance	HDCP 1.4 & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1920x1200 (interlaced & progressive)
Dimensions & Weight	146 x 30 x 128 mm 5.7" x 1.2" x 5.0" 0.36 kg / 0.8 lb
Ports	Gigabit Ethernet HDMI Out 3.5mm stereo out 3.5mm RS232 w/ null modem USB 2.0 (x2)
Bandwidth	180-500 Mbps
Power Supply (not included)	~4.7 – 23V 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum



ETHERNET


HDMI OUT

STEREO


RS232

© 2017 Just Add Power Cardware Co, Inc. All rights reserved. Unauthorized use or disclosure prohibited. Last updated Mar-17.
All specifications subject to change without notice. *IR control require the use of the VBS-HDMI-IRD.

All measurements in millimeters (mm)

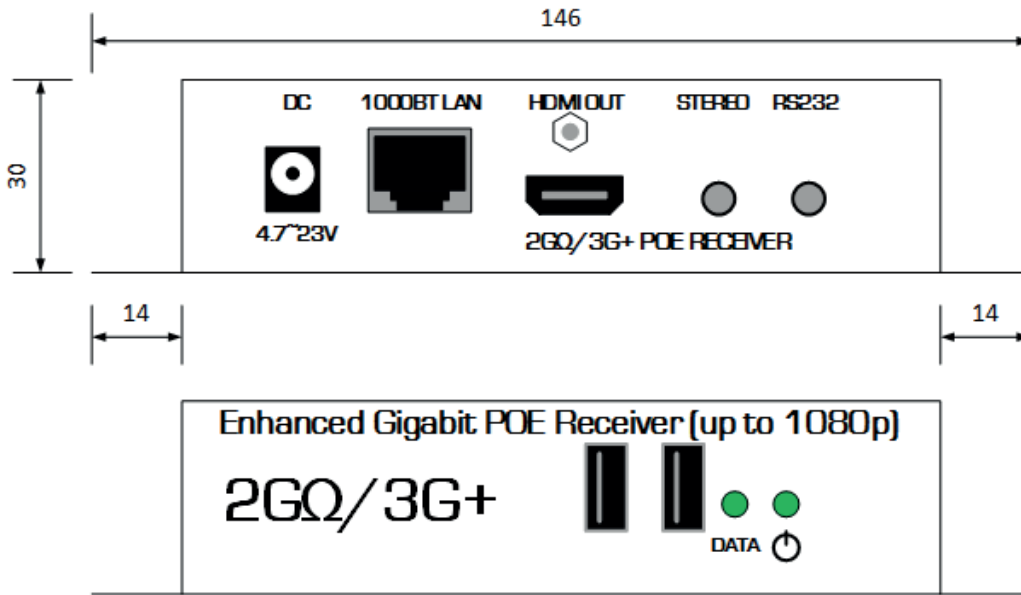

515PoE Front/Back

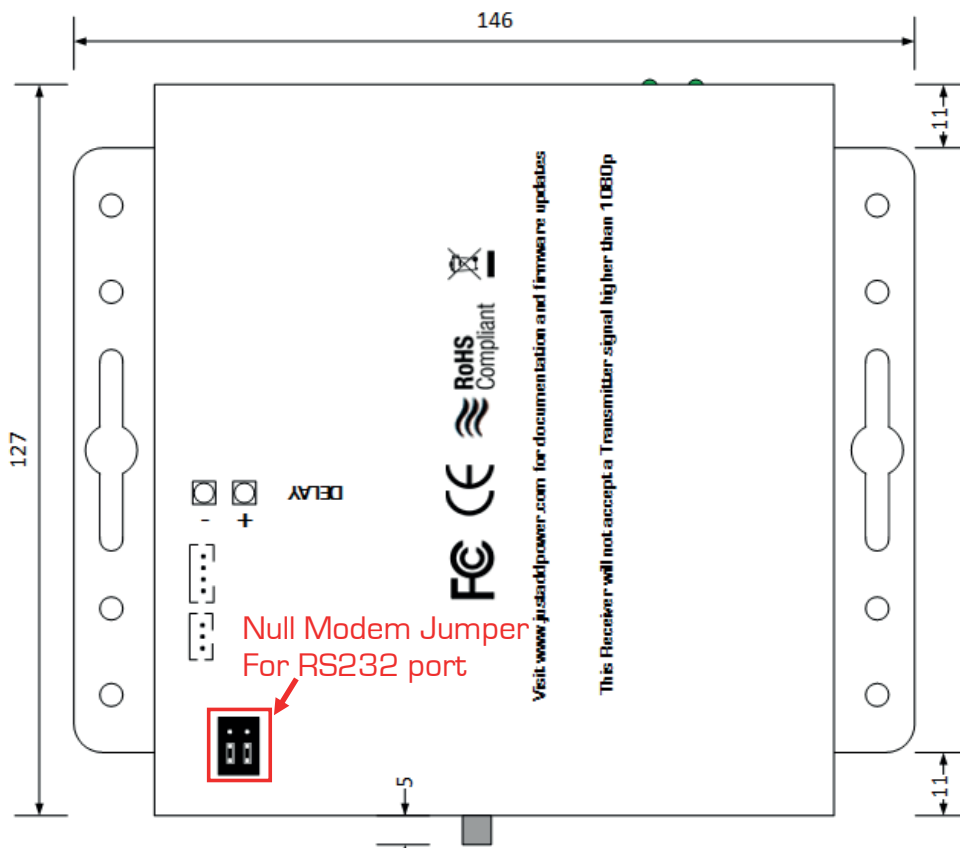

515PoE Bottom