

Dante® Compatibility

The Just Add Power 3G+ Dante® Sound System Transmitter adds compatibility with Dante® and AES67 audio networks to the UltraHD over IP system.

Input up to 8 channels into the Dante® network.

Extract up to 8 channels from the Dante® network, embed onto the HD over IP signal, and distribute across the Just Add Power network.


Mix-and-match! The 3G+ Dante® Sound System Transmitter is fully compatible with all 2GQ/3G and 3G devices.

Not just for Dante®. AES67 compatibility for interoperability with other leading audio-over-IP technologies




Features
Ultra HD & 4K video with HDCP 2.2
Input LPCM audio up to 8 channels
Dante® audio send and receive up to 8 channels
Inject Dante® audio into the J+P network
AES67 Compatibility Mode
HDMI pass-through
Control endpoints with RS232 & IR*


Compliance	HDCP 2.2 & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 4096x2160 (interlaced & progressive)
Dimensions & Weight	184 x 30 x 152 mm 7.2" x 1.2" x 6.0" 0.54 kg / 1.2 lb
Ports	J+P Gigabit Ethernet HDMI In HDMI Out 3.5mm RS232 w/ null modem Dante Gigabit Ethernet
Bandwidth	180-850 Mbps
Power Supply (not included)	~4.7 – 23V 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum

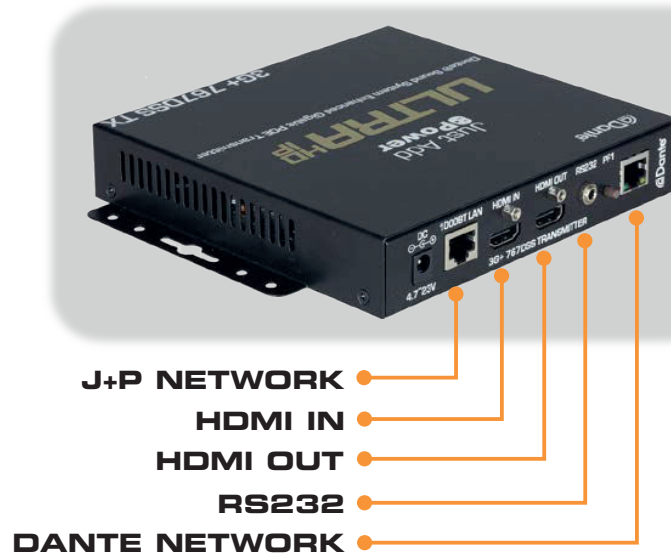

All measurements in millimeters (mm)

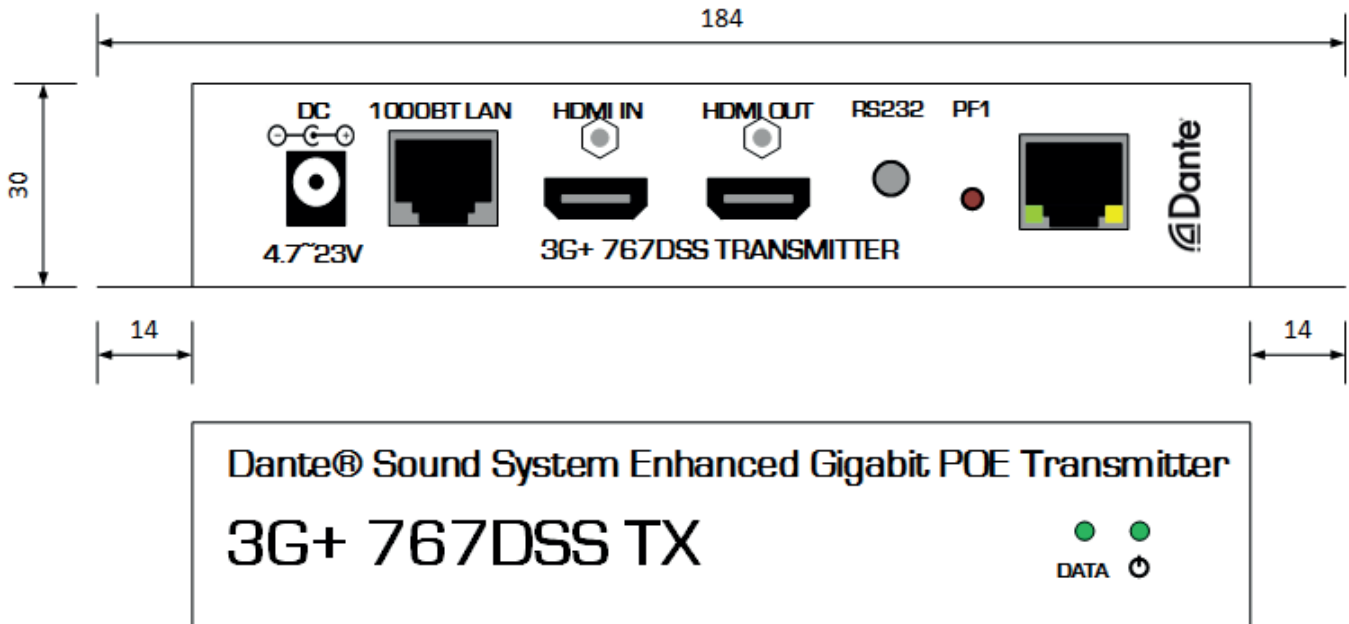

767DSS Front/Back

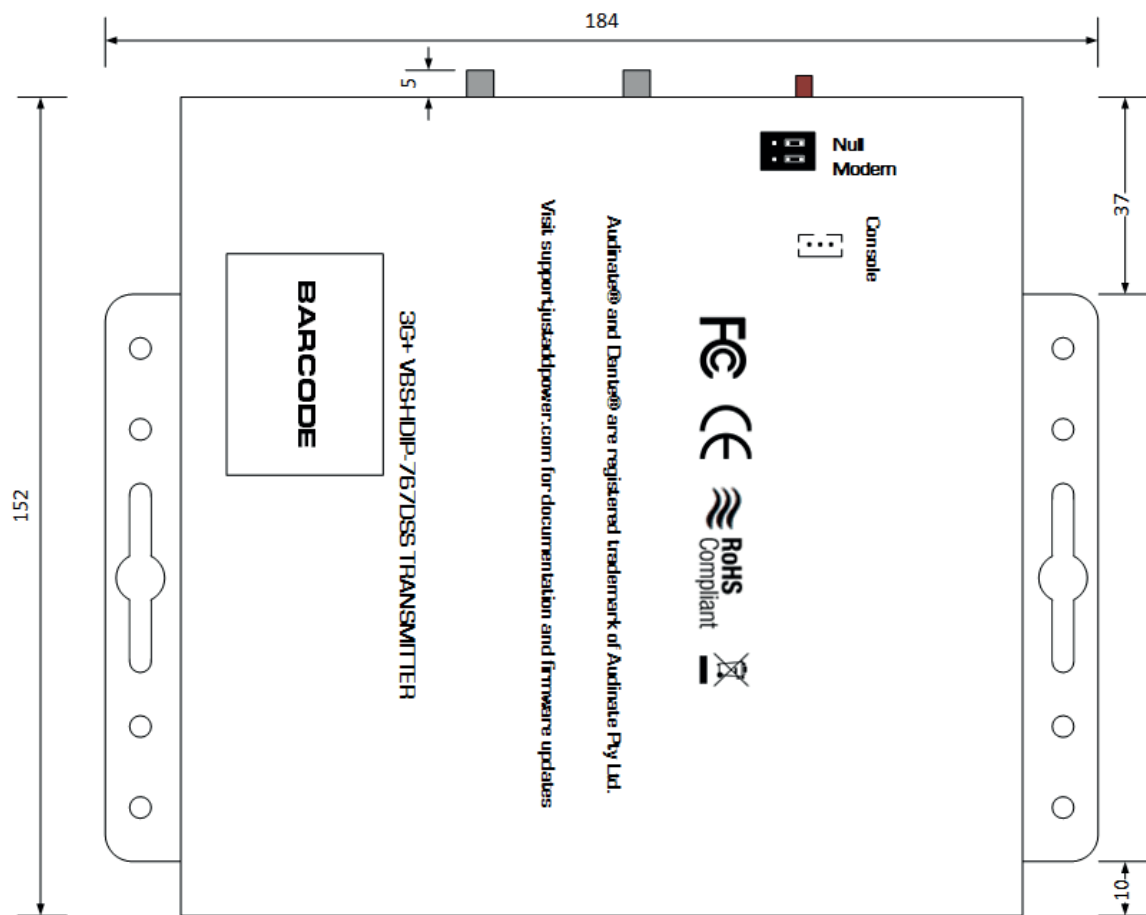

767DSS Bottom