TECHNICAL SHEET

Front view

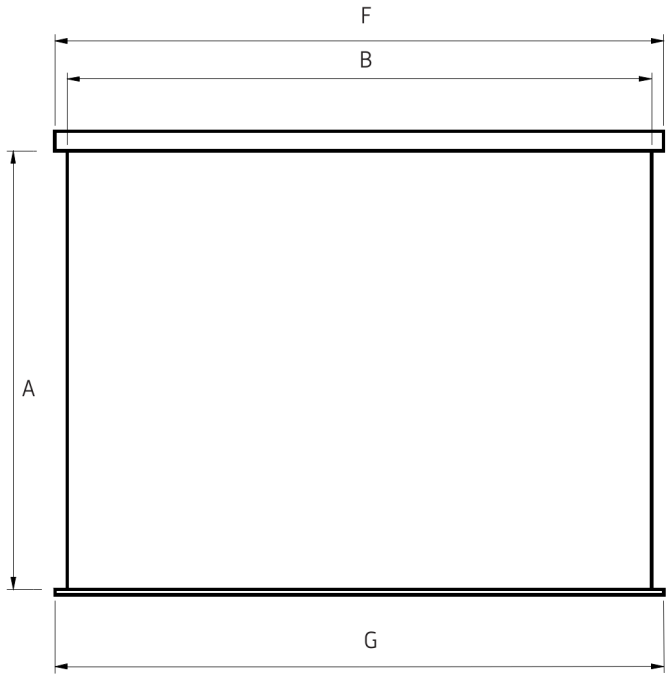

A Image height
B Image base
F Casing length
G Weighing bar length

The CINEFLEX PRO is equipped with a white aluminium case which design is very modern.

- M1 fire resistant Matt White projection surface
- The Speed Solo system enables you to place directly the screen on the wall or the ceiling very easily
- Low and high limit switch are factory preset
- Supplied with infrared remote control
- White lacquered aluminium casing
- Sliding brackets
- Quiet motor
- Quick Plug and Play connection

Technical data

CINEFLEX PRO Reference	A cm	B cm	F cm	G cm	Net weight kg
4:3 Format					
CF1B1180240	180	240	261	245	13,5
1:1 Format					
CF1B1150150	150	150	171	155	9,5
CF1B1180180	180	180	201	185	10,5
CF1B1200200	200	200	221	205	12
16:10 format					
CF1B1112180	112	180	201	185	10
CF1B1125200	125	200	221	155	11
CF1B1150240	150	240	261	245	13,5

Chemin de Beaurepaire
91410 DOURDAN - FRANCE
Tel +33 1 64 59 94 54
www.oray.fr

Extending brackets

Brackets diagram 10, 20, 30 or 40 cm

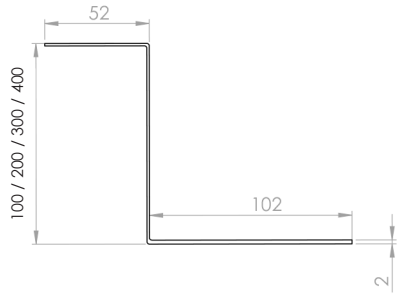

EXTENDING BRACKETS

The pair	Reference
10cm	OPTECAR10
20cm	OPTECAR20
30cm	OPTECAR30
40cm	OPTECAR40

Side view

Quick and easy fixing, sliding

Side diagram

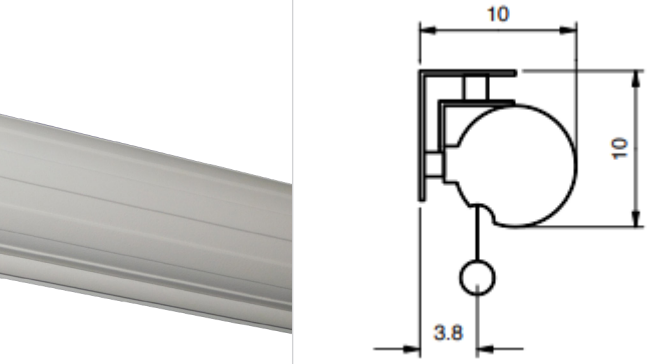

TECHNICAL SHEET

Chemin de Beaurepaire
91410 DOURDAN - FRANCE
Tel +33 1 64 59 94 54
www.oray.fr