

# Video Splitter HDMI 4K 1-4

The HDMI 4K 1-4 is a 4K video splitter with outstanding performance, excellent stability and high definition.

This splitter supports 1x HDMI 2.0 input and 4x HDMI 2.0 real-time outputs. The resolutions of both its input and outputs can be up to 4K×2K@60Hz. The input and output resolutions are the same.

This splitter is easy to use and supports plug and play. It is applicable to any devices with HDMI connectors and supports various set-top boxes, DVD players, player boxes and so on.



## Features

- Supports input and output resolutions up to 4K×2K@60Hz.
- Features the same timing of the input and output with up to Ultra HD 4K resolution.
- Supports 3D video source input.
- Supports up to 4:4:4 10-bit input.
- OLED display can display the input and output statuses in real time.
- Supports three EDID setting methods: standard, custom and EDID learning.
- Supports HDCP.
- Supports plug and play of both input and output, with no drivers required.
- Adopts metal heatsink design.
- Supports program update using a USB drive.
- Supports various certifications, such as RoHS.



## Specifications

### HDMI Input

Quantity	1
Standard	HDMI 2.0 connector supports HDCP 2.2 and HDCP 1.4.
Resolution	1024×768@23.98/50/59.94/60/85Hz 1920×1080@23.98/50/59.94/60/85Hz 3840×2160@23.98/50/59.94/60Hz

### HDMI Output

Quantity	4
Standard	HDMI 2.0 connector supports HDCP 2.2 and HDCP 1.4.
Resolution	1024×768@23.98/50/59.94/60/85Hz 1920×1080@23.98/50/59.94/60/85Hz 3840×2160@23.98/50/59.94/60Hz


### Control

USB	Connects to the control computer for online update.
-----	---

### Physical Characteristics

Power supply	DC 12 V
Power consumption	2 W
Operating temperature	0°C to +50°C
Storage temperature	-10°C to +60°C
Operating humidity	10% RH to 90% RH, non-condensing
Dimensions	200.0 mm × 132.8 mm × 38.9 mm
Package dimensions	357mm × 264mm × 85mm
Net weight	470 g
Material	Metal

## Dimensions

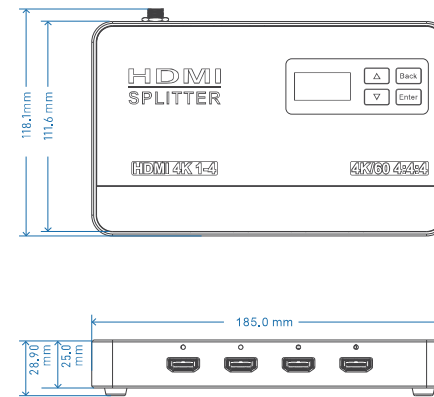

## Applications

