

## Features

- ▶ DisplayPort 1.2 – 21.6Gbps for resolutions up to 4K UltraHD 60Hz
- ▶ Gold plated precision contacts
- ▶ DisplayPort male to DisplayPort male
- ▶ High purity copper conductors and triple shielding
- ▶ 100% tested for professional AV applications

### Connections

Connector Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Bidirectional
Connector 1	DisplayPort Male
Dimensions Connector 1	ca. 26 x 20 x 9.5 mm
Connector 2	DisplayPort Male
Dimensions Connector 2	ca. 26 x 20 x 9.5 mm

### Cable



Type	Round Cable
Construction	5x Twisted Pairs 32AWG + 5x Single Conductors 32AWG + Drain
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	4.8mm
Minimum Bend Radius	33.6mm
Tensile Strength	1.05 kgf / mm <sup>2</sup>
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	Cable Standards, Max. Temperature, Combustion Class

### Signal Transmission

Standard	DisplayPort 1.2, HBR 2
Bandwidth / Max. Resolution	21.6 Gbps / 4K UltraHD 60Hz (4:4:4)

### General

Transmission Distance	Up to 3.00m
Operation Temperature	Up to 80°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, ROHS, REACH, WEEE, VW-1

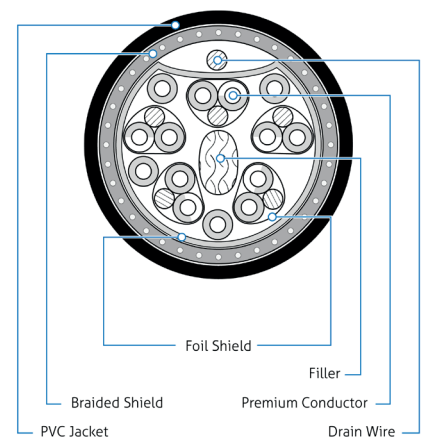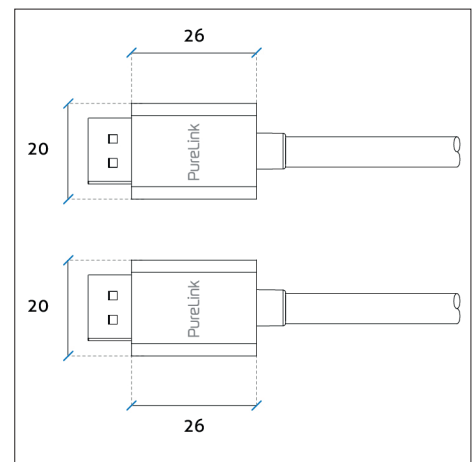

## IS2020 / IS2021 Overview

Parent	Art. No.	Length	Colour	EAN
IS2020	IS2020-010	1.00m	white	4251364709443
	IS2020-015	1.50m	white	4251364709450
	IS2020-020	2.00m	white	4251364709467
	IS2020-030	3.00m	white	4251364709474
IS2021	IS2021-010	1.00m	black	4251364728499
	IS2021-015	1.50m	black	4251364728505
	IS2021-020	2.00m	black	4251364728512
	IS2021-030	3.00m	black	4251364728529

