

# ULTRA Series

## UL-708POE (VBS-HDIP-708POE)

Just Add  
**Power**  
AV over IP Solutions

# 4K Encoder (Transmitter) with Stereo Audio Extraction

The Ultra Series 708POE Encoder (Transmitter) supports all audio formats and features a Stereo Audio Extraction port, ensuring high-quality audio performance and versatility..

Distribute 4K video, stereo audio, and breakout analog audio on a single device - along with all the 4K system wide features from the Ultra Series product line.



## Features


<b>Audio</b>	All audio formats supported  Stereo output when input is stereo compatible	<b>Image Pull</b>	Preview an image from any source or display in any web browser or control system - up to 10 fps
<b>HDCP 2.2 Support</b>	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	<b>Integrated Endpoint Control</b>	Control endpoints with RS232, IR and CEC
		<b>Scalability</b>	Fully compatible with Ultra and Omega products

# ULTRA Series

## UL-708POE (VBS-HDIP-708POE)


Just Add  
**Power**  
AV over IP Solutions

### Front of Device:

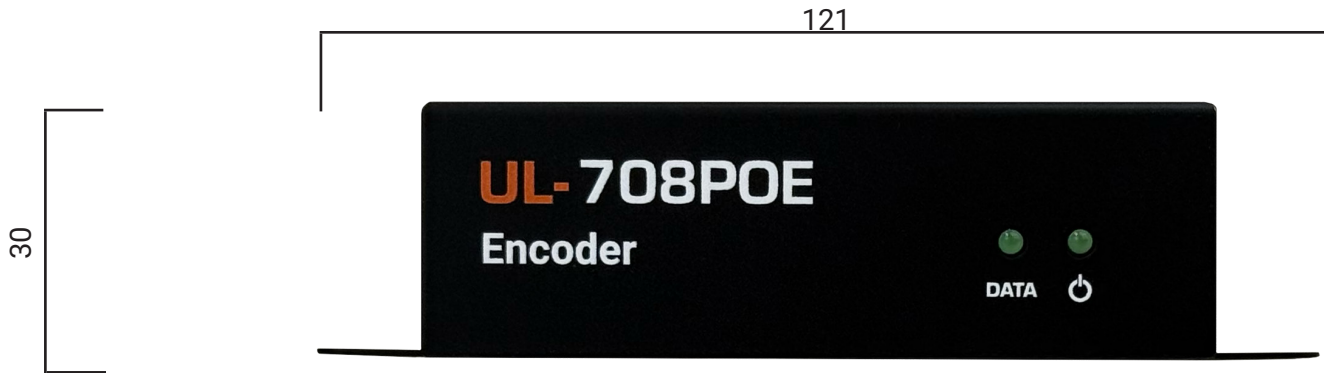

All measurements in millimeters (mm)

### Back of Device:

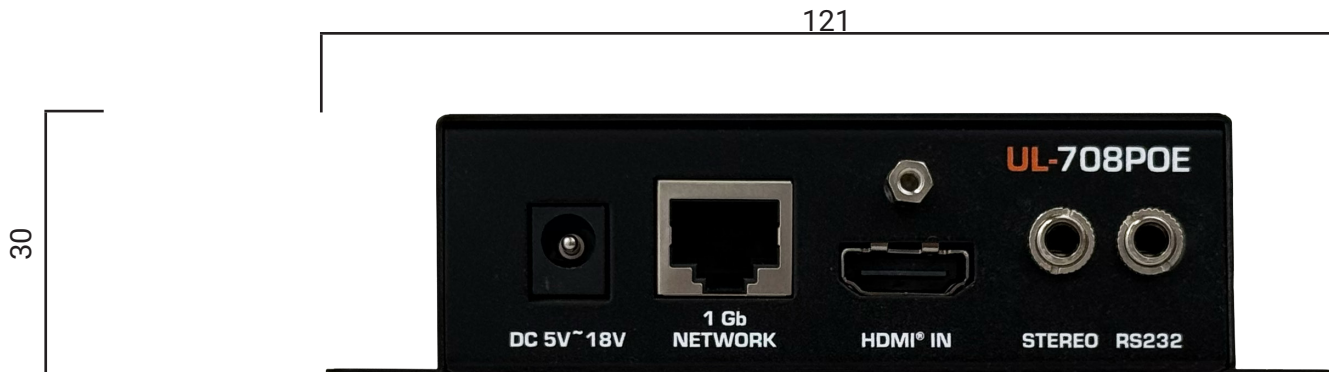

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE</b>	IEEE 802.3af (10W)
<b>Compliance</b>	HDCP 2.2 RoHS/FCC/CE	<b>Ports</b>	Gigabit Ethernet HDMI In 3.5mm Stereo Out 3.5mm RS232 w/null modem
<b>Dimensions &amp; Weight</b>	121 x 30 x 125 mm 4.8" x 1.2" x 4.9" in 0.27 kg / 0.6 lb	<b>Power Supply (not included)</b>	5V-18V 5.5mm/2.1mm, Positive tip
<b>Encryption</b>	AES-128 Encryption	<b>Supported Audio &amp; Video</b>	<b>Audio:</b> All Audio Formats and Stereo Audio Extraction  <b>Video:</b> Up to 4096x2160 (interlaced & progressive)
<b>Operating Temp</b>	0-60 °C / 32-140 °F		