ULTRA Series UL-718WP4 (VBS-HDIP-718WP4)



4K Wallplate Encoder (Transmitter) with Dolby DSP, Stereo Out, USB, and VGA



The Ultra Series 718WP4 Wallplate Encoder (Transmitter) fits into a 4-gang construction box and provides multiple video and audio inputs and outputs to any Just Add Power video distribution system.

Distribute Dolby Digital 5.1 audio to every zone and transform to stereo audio for 2-channel zones. Mix-and-match the Ultra 718WP4 Encoder (Transmiter) with any Ultra or Omega models to distribute any source to any zone.


Features

Audio	Dolby 5.1 Downmixing Stereo Audio Output 3.5mm	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
Colors	Analog controls for adjustable volume and delay. Black, White or Custom	KVM Support	Provides a local keyboard, mouse, touchscreen, gaming controller, joystick, or webcam with remote access to any computer on the system.
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Scalability	Fully compatible with all Ultra and Omega devices

ULTRA Series UL-718WP4 (VBS-HDIP-718WP4)




Front of Device:

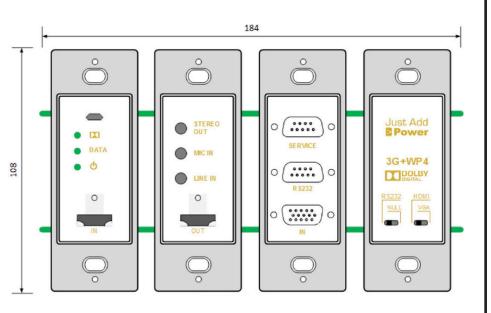

All measurements in millimeters (mm)

Side of Device:



IEEE802.3af (10W)

Specifications

Dimensions & Weight

HDCP 2.2 Gigabit Ethernet Compliance **Ports**

RoHS/FCC/CE HDMI In **HDMI** Out

108 x 184 x 79.5 mm 3.5mm Line-In 4.3" x 7.2" x 3.1" inch 3.5mm Mic-In 0.27kg / 0.6 lb 3.5mm Stereo Out

POE

DB9F RS232 w/ null modem **Encryption**

AES-128 Encryption DB9M Service port Micro-USB 2.0

Power Supply

Operating Temp 0-60 °C / 32-140 °F (not included) 5.5mm/2.1mm, Positive tip

Supported Audio: Dolby 5.1 Downmixing. Stereo Audio Output. Resolutions

> Video: Up to 4096x2160 (interlaced & progressive)

5V-18V