

PTZ Camera Controller



Key Features

- Multiple control and network protocol
- LCD screen on front panel with key tone
- Control code modified by customers
- Camera speed control via joystick
- Camera parameters adjustment via keys
- Multiple control connectors, up to 255 cameras
- Support PoE


Specification

Connectors	Communication	RS232	1×DB15
		RS422 (RS485)	1×5Pin Terminal
		LAN	1×RJ45
Performance	Control Protocol	VISCA Pelco-D Pelco-P	
	Network Protocol	ONVIF VISCA	
	Baud Rate(dps)	2400 4800 9600 19200 38400 115200	
	Display	LCD Screen	
	Key Tone	ON/OFF	
	Joystick	Four dimensions (control: up, down, left, right, zoom, rotation)	
	Upgrade	WEB upgrade	
Power	Input Voltage	DC12V	
	Max Power	6W	
Environment	Temperature	-10℃~50℃	
	Humidity	0%~90%	
Physical	Dimension	320mm×179.3mm×109.9mm	

Order Code

Product Code	Item
981-1000-03-0	PTZ Camera Controller

Dimension

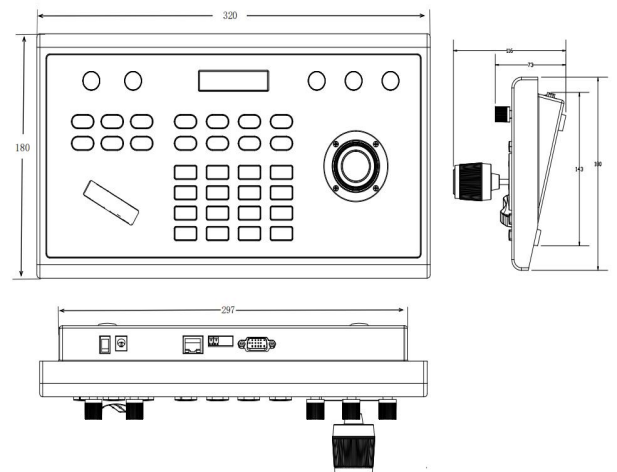

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgbink.com

