



PMR 60T

TWO-WAY PENDANT MONITOR SPEAKER



Description PMR 60T is a two-way pendant monitor speaker, suitable for a wide range of applications. Thanks to its elegant and discreet design and refined finishes, it is suitable for all environmental and architectural conditions. Featuring a 6.5" woofer and 80 W RMS power, it is also equipped with a transformer for connection to constant voltage lines (70/100 V). The high quality of its transducers (arranged in a coaxial configuration) guarantees faithful and precise musical reproduction throughout the audio spectrum and allows to reach truly remarkable sound pressure levels for such compact products. The connection is simple and safe thanks to the removable four-pole screw terminals. The front grille is fixed by magnets and can therefore be easily removed to access the power rotary switch.

- Features**
- › 80W RMS power handling
 - › 114 dB max SPL
 - › 70 ÷ 20000 Hz frequency range
 - › 130° constant directivity conical coverage angle
 - › 6.5" high power woofer
 - › 1" neodymium dome tweeter
 - › Self extinguishing plastic body
 - › Steel magnetic front grille
 - › 4 pole EUROBLOCK connector (audio input and parallel link output)
 - › 5 m hanging cable included


Part Number	13100098 PMR 60T W	White - RAL 9003	EAN 8024530020606
	13100100 PMR 60T B	Black - RAL 9005	EAN 8024530020590



PMR 60T

TWO-WAY PENDANT MONITOR SPEAKER

Line Art 2D

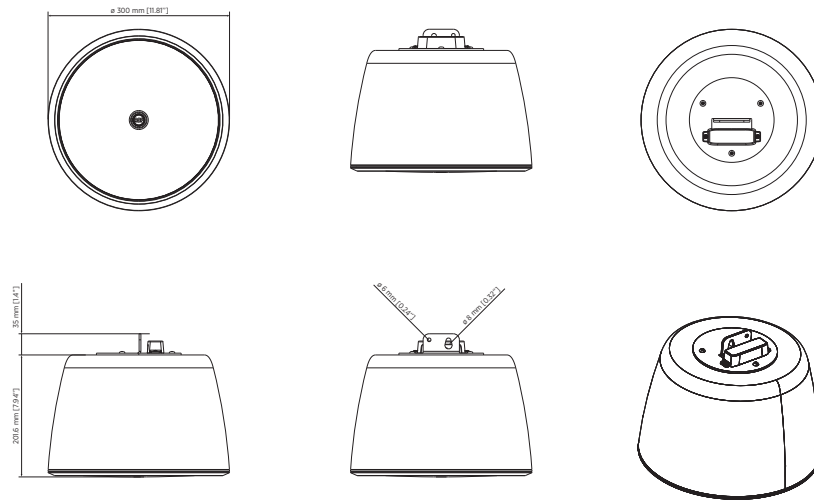

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	70 Hz - 20000 Hz
	Max SPL @ 1m	114 dB
	Coverage angle	130°
	System Sensitivity	89 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	80 W RMS
	Peak Power Handling	320 W PEAK
	Protections	Bulb lamp
	Crossover Frequencies	2500 Hz
Transducers	Recommended Amplifiers	XPS SERIES, KPS SERIES, DMA SERIES
	Dome Tweeter	1 x 1.0" neo, 1.0" v.c
	Woofer	1 x 6.5", 1.2" v.c
Input/Output section	Input connectors	Euroblock
	Output connectors	Euroblock
	Constant Voltage Transformer	70/100 V
	Power selection 1	80 W - 125 ohm
	Power selection 2	40 W - 250 ohm
	Power selection 3	20 W - 500 ohm
Standard compliance	Power selection 4	10 W - 1000 ohm
	Power selection 5	5 W - 2000 ohm
	Safety agency	CE compliant, UL 1480A



PMR 60T

TWO-WAY PENDANT MONITOR SPEAKER

Physical specifications	Cabinet/Case Material	ABS
	Grille	Steel
	Color	White - RAL 9003, Black - RAL 9005
Size / Weight	Height	236 mm / 9.29 inches
	Diameter	300 mm / 11.81 inches
	Weight	5.1 kg / 11.24 lbs