

traulux t-rent

MINILED

DARK KNIGHT




PRODUCT FEATURES

Universal hub allows switch between modules pitch 2.6 to 1.9
Cabinets calibrated with color coefficients
MOM (memory on module technology)
Miniled 4 in 1 minimizes the moire effect
Digital cinema initiative color space dci-ip3 enables more true and natural colors
Supports hdr bt2020
A8s-n or a10s.pro card for xr studio solutions
Refresh ratio for tv 3840 hz
Refresh ratio for virtual studio up to 7680 hz
Corner cabinet option
Certified hardware for hanging and stacking
Curve screen option
Contrast 10,000:1
Charmex official technical service
Flight cases for cabinets and hardware
Weight per square meter less than 30 kg
Scan rate 132 – 1/16 – 1/8 (depending on model)




T-RENT MINILED

**EXCLUSIVE MINILED 4 EN 1
CAN BEAR 14 KG IMPAC FOR LED**

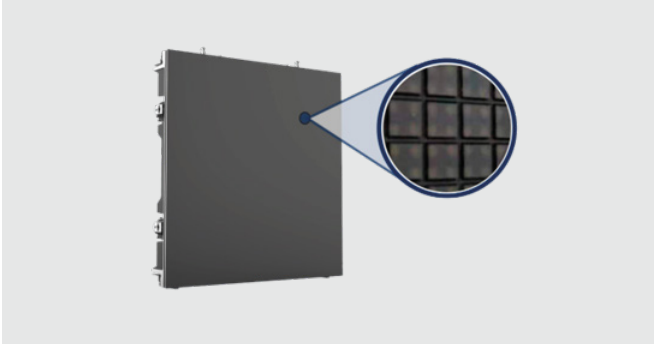


**LOCK CURVE SYSTEM
+6° +3° / -6° -3°**

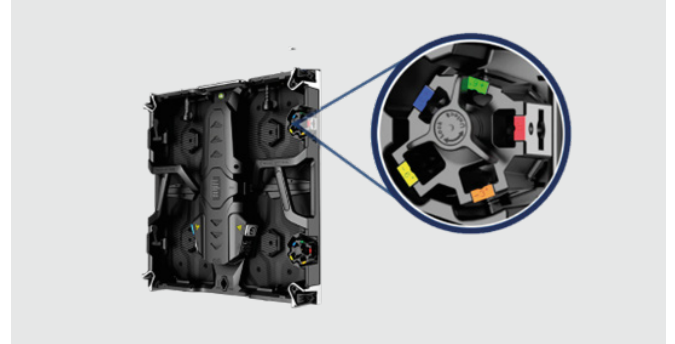

CORNER PROTECTION



**CORNER CABINET CURVE
SHAPE FOR 90° SCREEN**

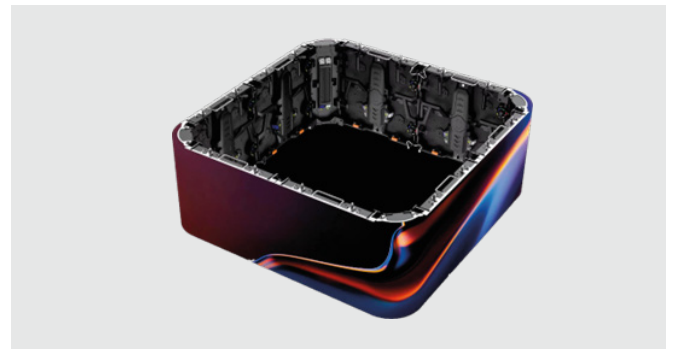

T-RENT 2.6 MINILED SERIES

	T-Rent 2.6- 32	T-Rent 2.6- 16	T-Rent 2.6- XR
Pixel Pitch	2.6		
Scan	1/32	1/16	1/8
Led	MINILED 4 en 1		
Ic driver	ICN2055		
HUB	Universal		
Refresh Rate	3840 Hz	7680 Hz	7680 Hz
Receiving card	A8s-N	A8s-N	A10s-PRO
Contrast	10.000:1		
Brightness	>1500 nits		
Size	500x500x75		
Resolution	192 px x 192 px		
Angulo visión H	175 °		
Angulo visión V	175 °		
Power Consum Max	180 w		
Power Consum Average	80 w		
Gray scale	16 bits		
Ip Ratio	Indoor		
Color Space	sRGB- DCI-Ip3 - BT2020		
HDR	Si		
Weight	8 kg		
Power Supply	MegMeet		
Hardware	Hanging y stacking		
Certifications	EMC Clase A-ROHS – CE - ETL		

T-RENT 1.9 MINILED SERIES

	T-Rent 1,9- 32	T-Rent 1,9- 16	T-Rent 1,9- XR
Pixel Pitch	1.9		
Scan	1/32	1/16	1/16
Led	MINILED 4 en 1		
Ic driver	ICN2055	MBI5264	
HUB	Universal		
Refresh Rate	3840 Hz	7680 Hz	7680 Hz
Receiving card	A8s-N	A8s-N	A10s-PRO
Contrast	10.000:1		
Brightness	>1300nits		
Size	500x500x75		
Resolution	256 px x 256 px		
Angulo visión H	160 °		
Angulo visión V	160 °		
Power Consum Max	180 w		
Power Consum Average	80 w		
Gray scale	16 bits		
Ip Ratio	Indoor		
Color Space	sRGB- DCI-Ip3 - BT2020		
HDR	Si		
Weight	8 kg		
Power Supply	MegMeet		
Hardware	Hanging y stacking		
Certifications	EMC Clase A-ROHS – CE - ETL		