

# URMIII2.6


500mm×500mm Indoor

Die-cast Aluminum LED Display Unit



Product features:

1. Click-lock—true single-person installation.
2. Pinch n' Go Module—new direction of module.
3. Flip-shield— comprehensive corner protection.

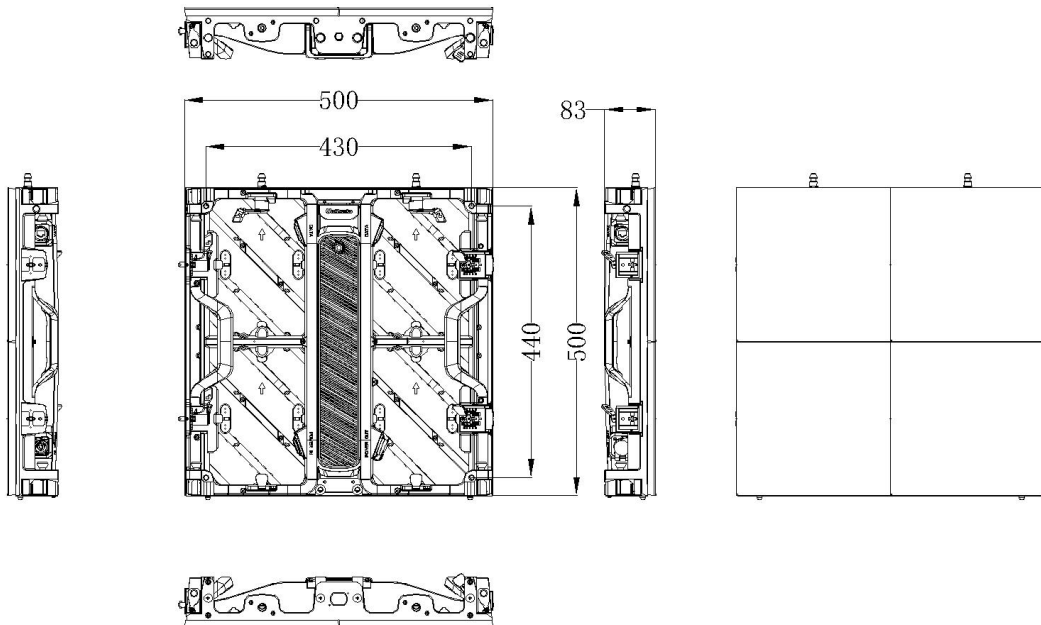

## Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.6mm
LED Type	3-in-1 Black SMD
Brightness	800 cd/m <sup>2</sup>
Pixel Density	147,456 pixels/m <sup>2</sup>
Pixels Per Panel	192×192 pixels
Module Size	W250mm×H250mm
Panel Size	W500mm×H500mm×D83mm
Weight	7.9 kg/panel
Maintenance	Rear
Ingress Protection	IP30
Curve	(Convex) -10°~+10°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m <sup>2</sup>
Recommended Viewing Distance	≥2.6m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K-9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	4,000:1
Input Power <Max>	120 W/panel
Input Power <Typical>	35 W/panel
Input Voltage	100~240 VAC
Processing Depth	14 bit
Scan Method	1/32
Refresh Rate	3840 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+50°C/10~80%RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Hanging, Stacking
Certification	TUV-CE/CB/FCC/IC/UL

- Note:**
1. Specifications are for reference based on normal temperature conditions(25°C).
  2. Power consumption tolerance: ±15%, according to the installation site environment.
  3. Specifications are for reference only and are subject to change without notice.